


HEADROOM AND BACKDEPTH REQUIREMENTS FOR STANDARD LIFT DOORS

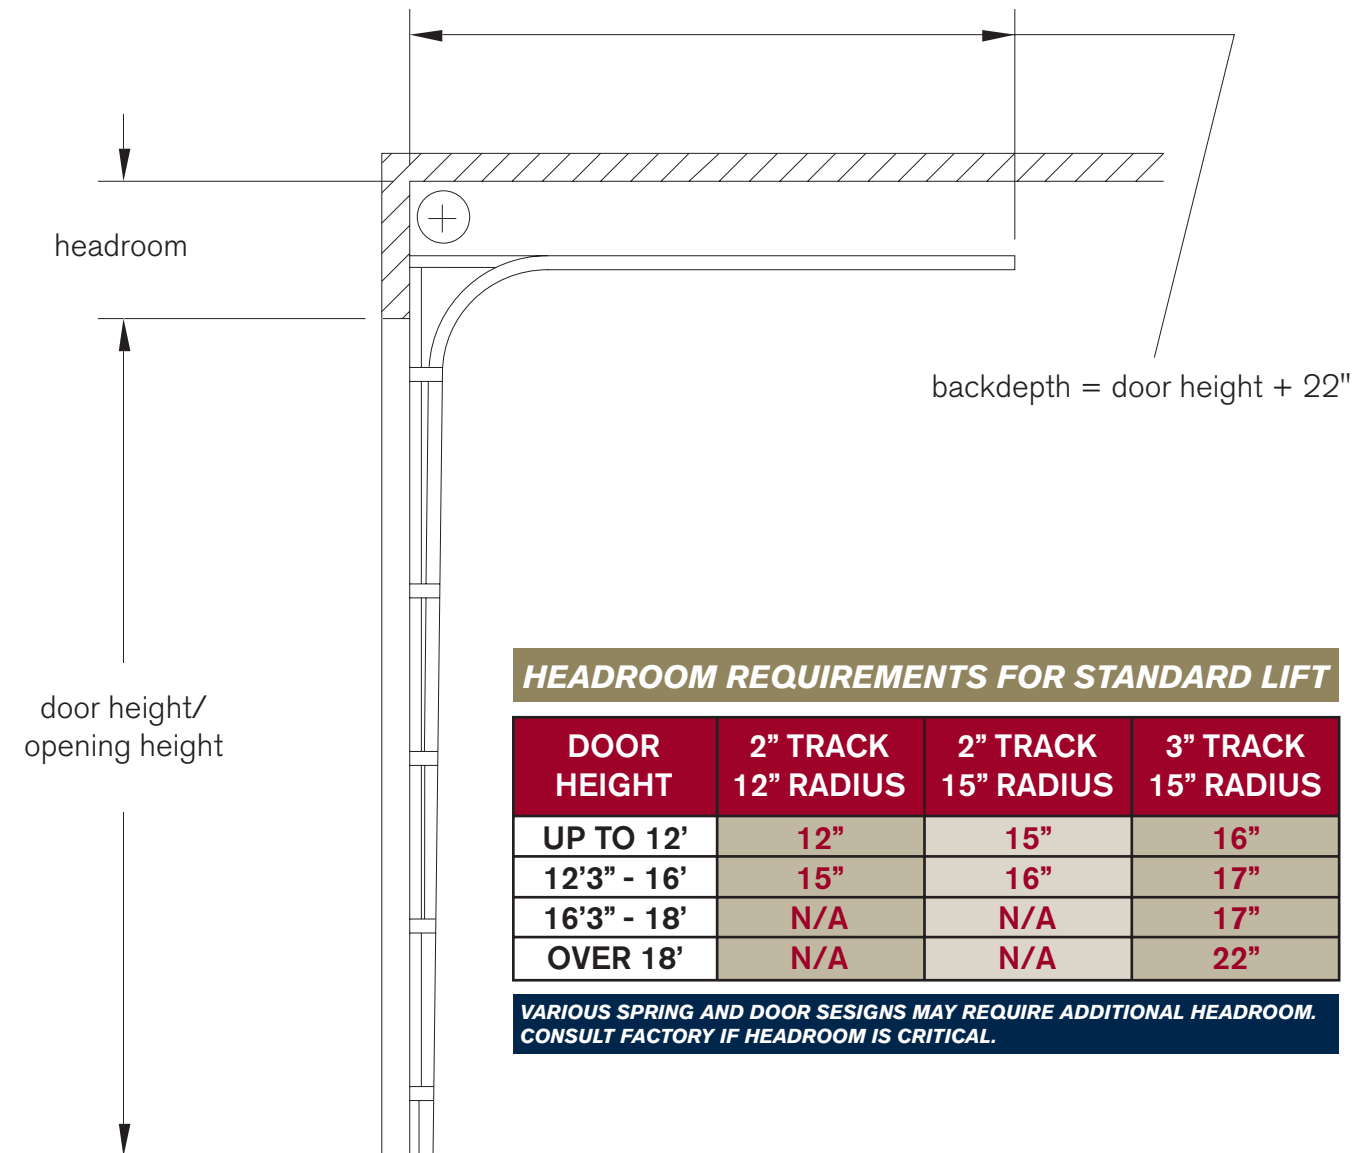

HEADROOM REQUIREMENTS FOR STANDARD LIFT

DOOR HEIGHT	2" TRACK 12" RADIUS	2" TRACK 15" RADIUS	3" TRACK 15" RADIUS
UP TO 12'	12"	15"	16"
12'3" - 16'	15"	16"	17"
16'3" - 18'	N/A	N/A	17"
OVER 18'	N/A	N/A	22"

VARIOUS SPRING AND DOOR SESIGNS MAY REQUIRE ADDITIONAL HEADROOM. CONSULT FACTORY IF HEADROOM IS CRITICAL.